


## HLC1395

Reflective Sensor

### FEATURES

- Side-looking plastic package
- Phototransistor output
- IR emitter and phototransistor detector in a single package
- Low profile for design flexibility
- Designed for short distance detection
- High sensitivity
- Unfocused for sensing diffused surfaces

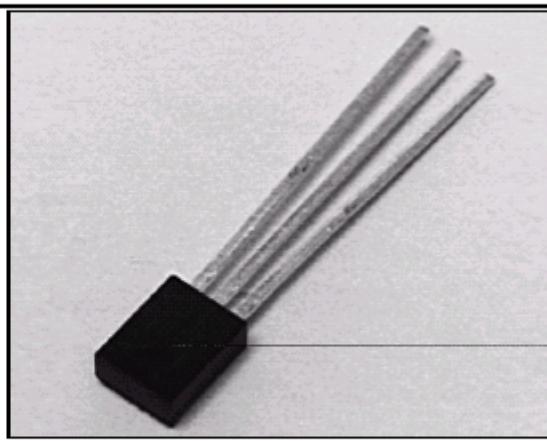

INFRARED


### DESCRIPTION

The HLC1395 is a miniature infrared sensor designed to sense reflective objects at short distances. Both the GaAs IRED and the NPN phototransistor are mounted side-by-side in a single black plastic package with an integral barrier to minimize crosstalk. The sensor is configured with the IRED cathode and the phototransistor emitter connected to a common lead.

The housing consists of an opaque polysulfone outer shell with transfer-molded, IR-transmissive epoxy encapsulant. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

### OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals  $\pm 0.010(0.25)$   
2 plc decimals  $\pm 0.030(0.76)$

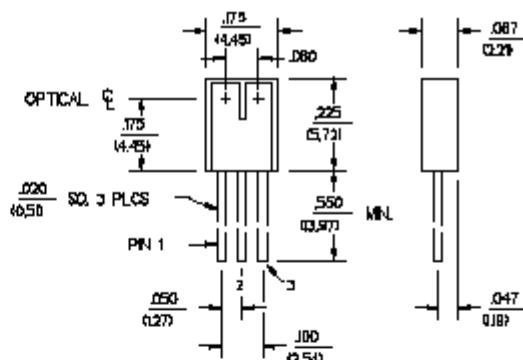

DIM\_029.cdr

# HLC1395

Reflective Sensor

## ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR Emitter						
Forward Voltage	$V_F$			1.8	V	$I_F=20 \text{ mA}$
Reverse Current	$I_R$			10	$\mu\text{A}$	$V_R=3 \text{ V}$
Detector						
Collector-Emitter Breakdown Voltage	$V_{BE(BD)}$	30			V	$I_C=100 \mu\text{A}$
Emitter-Collector Breakdown Voltage	$V_{CE(BD)}$	5.0			V	$I_E=100 \mu\text{A}$
Collector Dark Current	$I_{CSD}$			100	nA	$V_{CE}=10 \text{ V}, I_E=0$
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_C(\text{ON})$				mA	$V_{CE}=5 \text{ V}$
HLC1395-001		0.30				$I_F=10 \text{ mA}$
HLC1395-002		0.60				(1)
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$		0.5		V	$I_C=40 \mu\text{A}, I_R=10 \text{ mA}$ (1)
Crosstalk (2)	$I_{CX}$		15		$\mu\text{A}$	$V_{CE}=5 \text{ V}, I_F=10 \text{ mA}$
Rise And Fall Time	$t_r, t_f$		15		$\mu\text{s}$	$V_{CE}=5 \text{ V}, I_C=0.3 \text{ mA}$ $R_L=1000 \Omega$

## Notes


- Test surface is Eastman Kodak neutral white test card with 90% diffuse reflectance located 0.040 in. (1.0 mm) from the front surface of the device.
- Crosstalk ( $I_{CX}$ ) is the collector current measured with current to emitter and no reflecting surface.

## ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C
IR Emitter	
Reverse Voltage	3 V
Continuous Forward Current	50 mA
Power Dissipation	100 mW (1)
Detector	
Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation	100 mW (1)
Collector DC Current	30 mA

## SCHEMATIC

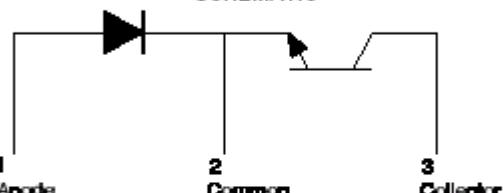

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.







# Honeywell

241

深圳市新世联科技有限公司

**HLC1395**

Reflective Sensor

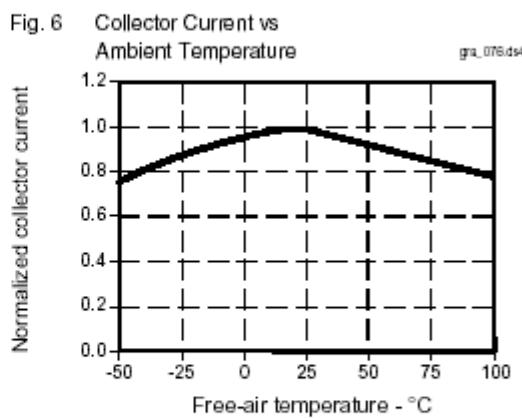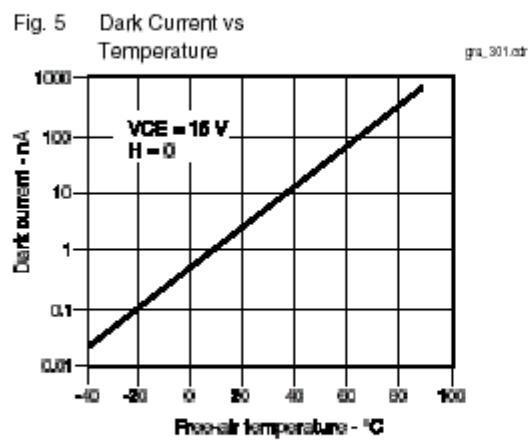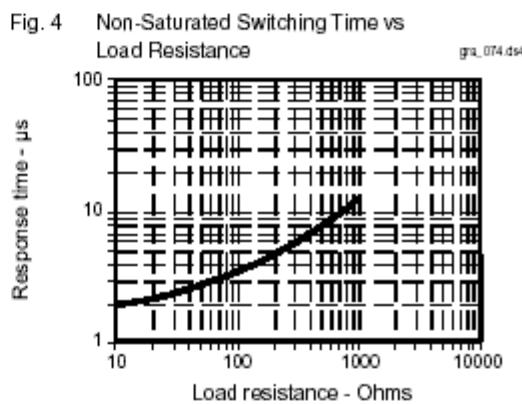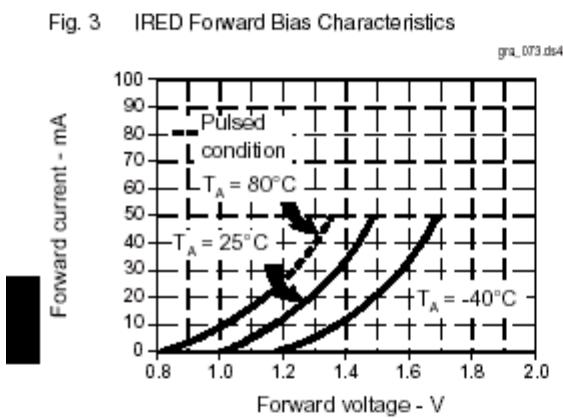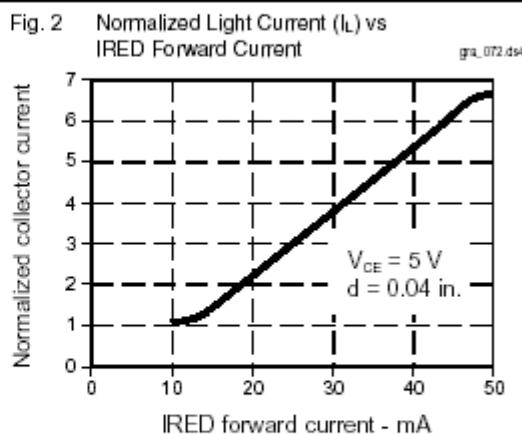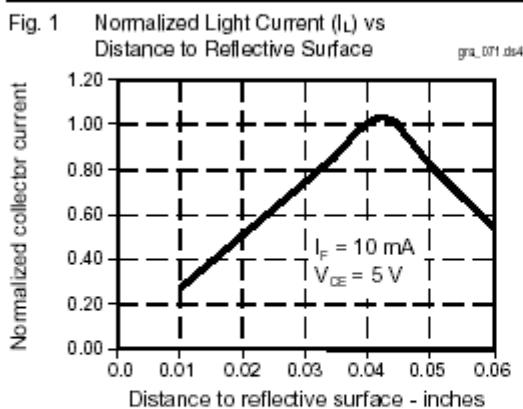

All Performance Curves Show Typical Values