

Specification


chnical

CO-BF Carbon Monoxide Sensor



Figure 1 CO-BF Schematic Diagram

PATENTED

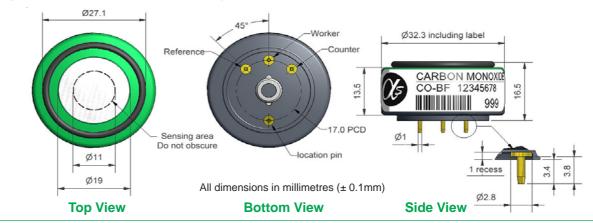

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 400ppm CO t ₉₀ (s) from zero to 400ppm CO ppm equivalent in zero air RMS noise (ppm equivalent) ppm limit of performance warranty ppm CO error at full scale, linear at zero, 1000ppm CO maximum ppm for stable response to gas pulse		80 to 130 < 25 < ± 4 < 0.5 5,000 < ± 30 10,000
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/year in lab air, monthly test months until 80% original signal (24 month warranted)		< 0.1 < 3 > 24
ENVIRONMENTA		C % (output @ -20°C/output @ 20°C) @ 400ppm CO C % (output @ 50°C/output @ 20°C) @ 400ppm CO ppm equivalent change from 20°C ppm equivalent change from 20°C		70 to 88 102 to 115 < -1 to +4 < ± 6
CROSS SENSITIVITY	Filter capacity Filter capacity Filter capacity Filter capacity Filter capacity H ₂ S sensitivity NO ₂ sensitivity Cl ₂ sensitivity NO sensitivity SO ₂ sensitivity H ₂ sensitivity C ₂ H ₄ sensitivity NH ₃ sensitivity	ppm·hrs ppm·hrs ppm·hrs ppm·hrs ppm·hrs % measured gas @ 20ppm % measured gas @ 10ppm % measured gas @ 50ppm % measured gas @ 20ppm % measured gas @ 20ppm % measured gas @ 400ppm % measured gas @ 400ppm % measured gas @ 20ppm % measured gas @ 20ppm	$\begin{array}{c} {\rm H_2S} \\ {\rm NO_2} \\ {\rm NO} \\ {\rm SO_2} \\ {\rm H_2S} \\ {\rm NO_2} \\ {\rm CI_2} \\ {\rm NO} \\ {\rm SO_2} \\ {\rm H_2at20^\circ C} \\ {\rm C_2H_4} \\ {\rm NH_3} \end{array}$	250,000 120,000 120,000 160,000 < 0.1 < 0.1 < 0.1 < 25 < 0.1 < 65 < 65 < 0.1
KEY SPECIFICATIONS	Temperature range Pressure range Humidity range	°C kPa % rh continuous		-30 to 50 80 to 120 15 to 90



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

 Ω (recommended)

Apollosense Ltd

10 to 47

< 13

Shenzhen:

Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031,

Storage period

Load resistor Weight

China

Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755)83680866

Hong Kong:

months @ 3 to 20°C (stored in sealed pot)

Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel: (852) 2737 0903 Fax: (852) 2737 0938 Email: sales@apollounion.com



Jecification

chnica

CO-BF Performance Data

Figure 2 Sensitivity Temperature Dependence


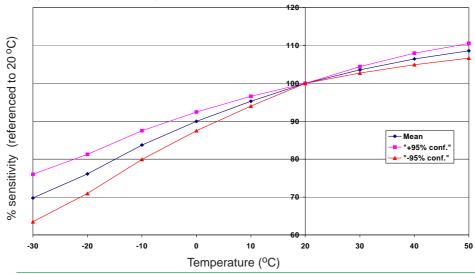


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and \pm 95% confidence intervals are shown.

Figure 3 Sensitivity Long Term Stability

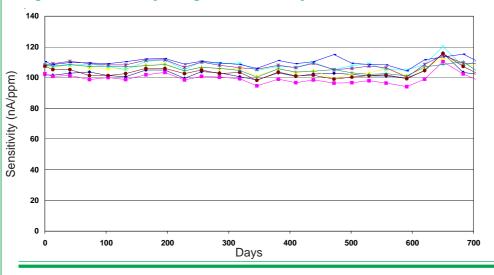

When sensors are tested monthly, their very good stability shows that they can be used in fixed sites, where maintenance and recalibration costs are important.

Figure 4 Response to 1% CO

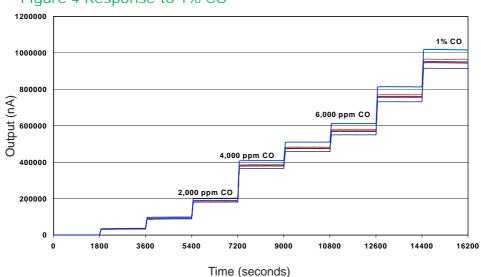


Figure 4 shows the response to step changes in CO concentrations from zero to 1% by volume.

Apollosense Ltd

Shenzhen:

Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031,

Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755)83680866

Hong Kong: Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel: (852) 2737 0903 Fax: (852) 2737 0938

Email: sales@apollounion.com