

Specification


chnica

NO2-D4 Nitrogen Dioxide Sensor **Miniature Size**



Figure 1 NO2-D4 Schematic Diagram

PATENTED

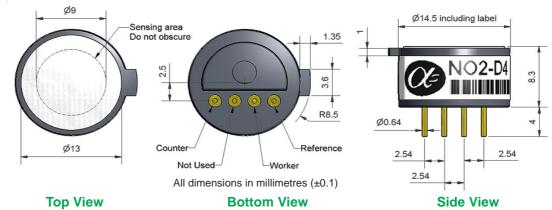

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 10ppm NO ₂ t ₉₀ (s) from zero to 10ppm NO ₂ ppm equivalent in zero air RMS noise (ppm equivalent) ppm NO ₂ limit of performance warranty ppm error at full scale, linear at zero and 10ppm NO ₂ maximum ppm for stable response to gas pulse	-200 to -450 < 35 ± 0.8 0.1 20 0 to -0.6 60
LIFETIME	Zero drift	ppm equivalent change/year in lab air	nd

Sensitivity drift Operating life	% change/month in lab air, twice monthly test months until 80% original signal (24 month warranted)	nd > 24
ENVIRONMENTALSensitivity @ -20°C	5% (output @ -20°C/output @ 20°C) @ 10ppm	75 to 95

ENVIRONMENTAL Sensitivity @ -20 C	, % (output @ -20 C/output @ 20 C) @ Toppin	75 10 95
Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 10ppm	90 to 105
Zero @ -20°C	ppm equivalent change from 20°C	$< \pm 0.6$
Zero @ 50°C	ppm equivalent change from 20°C	< ± 1.5

sensitivity % measured gas @ 20nnm

CROSS SENSITIVITY

1120	Scrisitivity	70 measured gas 🐷	ZUPPIII	1120	< -200
$C\bar{L}_2$	sensitivity	% measured gas @	10ppm	CĹ ₂	< 120
NO	sensitivity	% measured gas @	50ppm	NO	< 0.5
SO_2	sensitivity	% measured gas @	20ppm	SO ₂	< -3
CO	sensitivity	% measured gas @	400ppm	CO	< 0.1
H_2	sensitivity	% measured gas @	400ppm	H_2	< 0.1
C_2H_4	sensitivity	% measured gas @	400ppm	C_2H_4	< 0.1
$N\bar{H}_3$	sensitivity	% measured gas @	20ppm	$N\bar{H}_3$	< 0.1
CO_2	sensitivity	% measured gas @	10%	CO ₂	< 0.1
O_3	sensitivity	% measured gas @	200ppb	O_3	< 70

H-S

KEY Temperature ra	inge ^O C	-20 to 50
SPECIFICATIONS Pressure range	e kPa	80 to 120
Humidity range	%rh (see note below)	15 to 90
Storage period	months @ 3 to 20 ^O C (stored in sealed pot)	6
Load resistor	Ω (for optimum performance)	33
Weight	q	< 2

Note: Above 85% rh and 40°C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover normal electrolyte volumes when allowed to rest at lower %rh and temperature levels for several days.



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

Hong Kong:

Apollosense Ltd

-200

Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031,

Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755)83680866

Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K.

Tel: (852) 2737 0903 Fax: (852) 2737 0938 Email: sales@apollounion.com



pecification

chnical

NO2-D4 Performance Data

Figure 2 Sensitivity Temperature Dependence

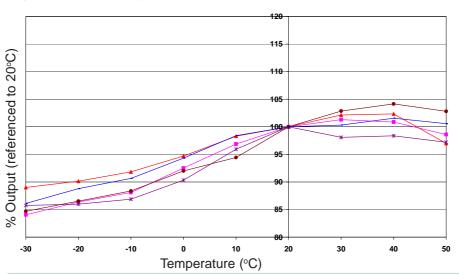


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of NO2-D4 sensors. Good repeatability means accurate temperature compensation.

Figure 3 Zero Temperature Dependence


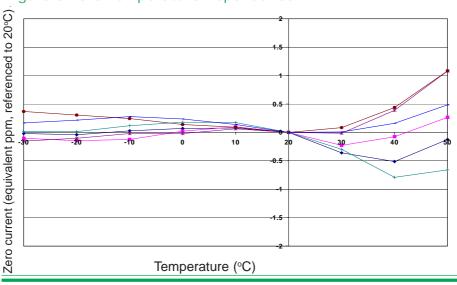


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

Figure 4 Repeated gassing with 20ppm NO₃

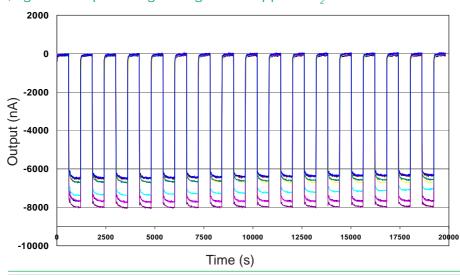

This hyteresis graph shows stable response when gassed repeatedly with 20ppm NO₂

Apollosense Ltd

Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031,

Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755) 83680866

Hong Kong:

Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K. Tel: (852) 2737 0903

Fax: (852) 2737 0938 Email: sales@apollounion.com